





TWIN SHAFT FLEXKIT

These fully flashed skylight kits can be a cost effective option for some multiple skylight situations. These units have two equal size shafts emanating from one larger skylight thereby reducing installation time and cost. Ideally these are used where two diffusers are desired due to room aesthetics. They can also be used to provide light and ventilation to adjoining rooms.

Kits are AVAILABLE FOR MOST ROOF TYPES and come complete with :

- > Acrylic opal dome fixed to a fully flashed metal base
- > 2 x highly reflective, u.v. resistant reinforced flexilight skylight shaft
- > 2 x white ceiling trims
- > 2 x diffusers (eggcrate for vented; prismatic for non-vented model, vented prismatic model also available P.O.A.)

NOTE: 500 x 1200 skylight base used to suit 500 x 500 twin shaft
600 x 1200 skylight base used to suit 600 x 600 twin shaft

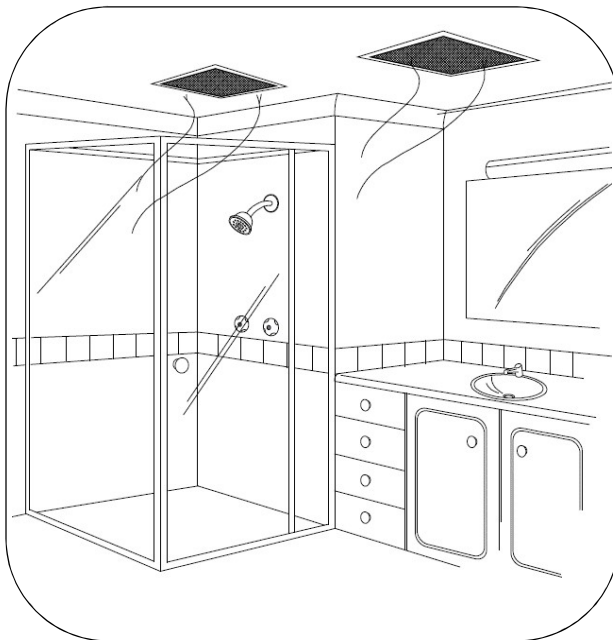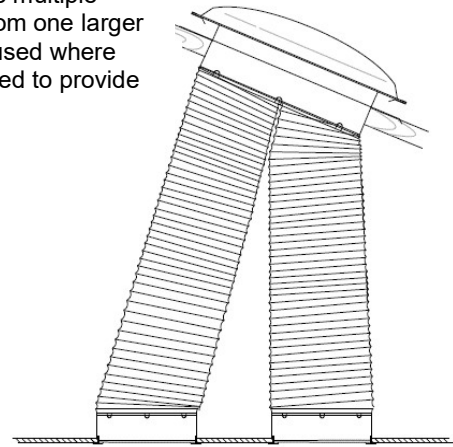

SELECTION CHART

SKYLIGHT SIZE (INTERNAL OPENING)	SHAFT SIZE	LIGHT AREA (m ²)	STANDARD VENT AREA (m ²)	BCA VENT AREA (m ²)	EXTRA BCA VENT AREA (m ²)
500 x 1200	2 @ 500 x 500	0.500	0.144	0.312	0.370
600 x 1200	2 @ 600 x 600	0.720	0.152	0.328	0.452



REGENT SKYLIGHTS

The skylight system illustrations contained in this brochure are the sole property of Regent Skylights and are reserved under copyright law. It is the responsibility of the user to ensure that the selected skylight system complies with the relevant building codes and authorities requirements. Regent Skylights reserves the right to improve or modify the skylight systems at any time. Zinalume® and Colorbond® are registered trademarks of BlueScope Steel Limited.