





STEEL DECK TUBELIGHT (kerb style overflashing)

Steel Deck Tubelights are generally used for flat roofs where a hob or kerb has been supplied by the builder, or is intended to be built. They are suitable for kerbs constructed out of steel, concrete or timber. Please refer to the installation guide for differing kerb types. These unflashed tubelight kits provide everything you need to bring natural light into your living environment and are ideal for the handyman and tradesman alike. Kits are complete with:

- > Hi-impact opal acrylic dome fixed to a fully flashed metal base
- > 1.5m Highly reflective, U.V resistant reinforced flexilight skylight shaft
- > Circular ceiling trim and diffuser


Regent Non-Vented BFA Tubelights comply to AS3959 requirements for Bushfire areas up to and including BAL 19. They will also comply with BAL 29 requirements if roof pitch is 18° or greater.

Fire Dampers for 400mm Tubelights are available as an accessory for fire rated ceiling installations.

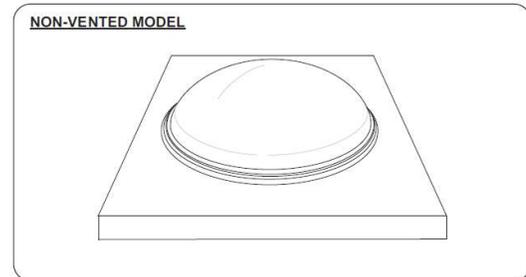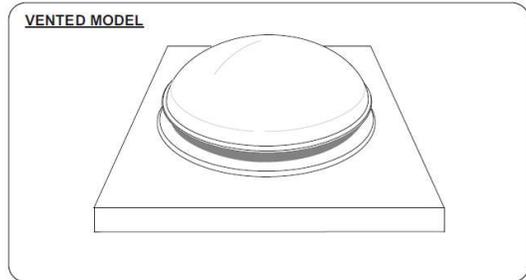


TUBELIGHT KITS - flashing to suit individual roof type

SECTIONAL DETAILS

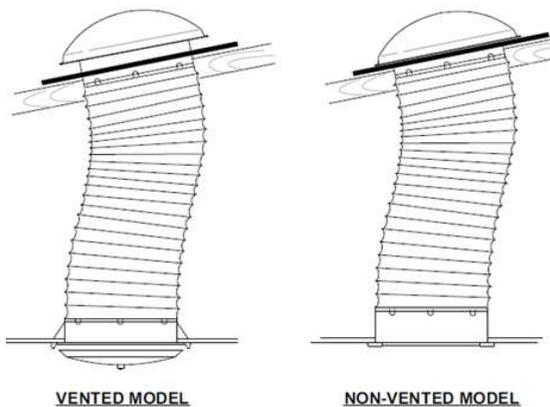

VENTED MODEL

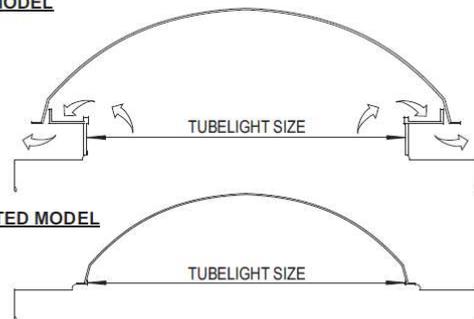

NON-VENTED MODEL

MATERIALS

Standard tubelights are constructed with a press formed Zinalume® base and a high impact acrylic (prismatic) dome. Fabricated bases are available (in stainless steel, aluminum, copper and galvanised) to meet individual customer requirements. Domes can also be manufactured from polycarbonate and in clear, opal or tint finishes.

SELECTION CHART

SIZE	VENTED MODEL	NON VENTED MODEL	BFA MODEL	LIGHT AREA (m ²)	VENT AREA (m ²) (Vented model)	REQ. KERB SIZE	
						Max External	Min Internal
300	TSDS300V	TSDS300NV	TSDS300NVBFA	0.07	0.02	500 x 500	300 x 300
400	TSDS400V	TSDS400NV	TSDS400NVBFA	0.13	0.02	600 x 600	400 x 400
500	TSDS500V	TSDS500NV	TSDS500NVBFA	0.20	0.05	600 x 800	500 x 500



REGENT SKYLIGHTS

The skylight system illustrations contained in this brochure are the sole property of Regent Skylights and are reserved under copyright law. It is the responsibility of the user to ensure that the selected skylight system complies with the relevant building codes and authorities requirements. Regent Skylights reserves the right to improve or modify the skylight systems at any time. Zinalume® and Colorbond® are registered trademarks of BlueScope Steel Limited.