



## BAL - RATED BUSHFIRE TUBELIGHT

Regent Skylights manufacture tubelights fitted with a non-combustible barrier at roof level for bushfire protection (suitability to conform to Bushfire Requirements subject to Local Authority or Building Certifier Approval).



**Regent Non-Vented BFA Tubelights comply to AS3959 requirements for Bushfire areas up to and including BAL 19. They will also comply with BAL 29 requirements if roof pitch is 18° or greater. Fire Dampers for 400mm Tubelights are available as an accessory for fire rated ceiling installations.**

### BFA Tubelight Kits are complete with:

- > Hi-impact opal acrylic dome fixed to a fully flashed metal base
- > Glazed barrier to comply with AS3959
- > 1.5m Highly reflective, U.V resistant reinforced flexilight skylight shaft
- > Circular ceiling trim and diffuser

### TUBELIGHT KITS - flashing to suit individual roof type

### SECTIONAL DETAILS

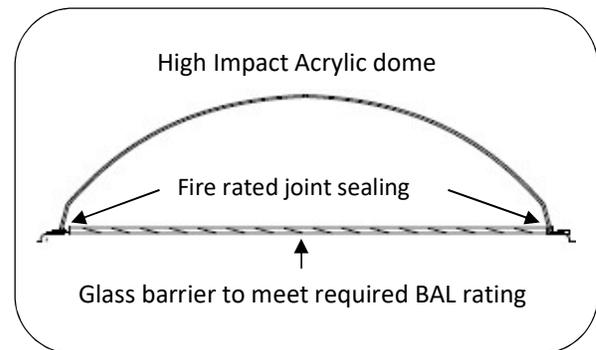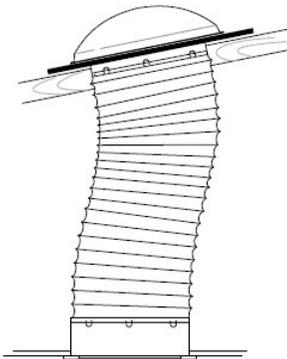

### MATERIALS

Standard tubelights are constructed with a press formed Zinalume® base and a high impact acrylic (prismatic) dome. Fabricated bases are available (in stainless steel, aluminum, copper and galvanised) to meet individual customer requirements. Domes can also be manufactured from polycarbonate and in clear, opal or tint finishes.

### SELECTION CHART

SIZE	CORROLUX IRON	METAL DECK	TILED ROOF	STEEL DECK**	REQ. KERB SIZE**		LIGHT AREA (m <sup>2</sup> )
					Max External	Min Internal	
300	TCLX300NVBFA	TUMD300NVBFA	TZTS300NVBFA	TSDS300NVBFA	500 x 500	300 x 300	0.07
400	TCLX300NVBFA	TUMD400NVBFA	TZTS400NVBFA	TSDS400NVBFA	600 x 600	400 x 400	0.13
500	TCLX300NVBFA	TUMD500NVBFA	TZTS500NVBFA	TSDS500NVBFA	600 x 800	500 x 500	0.20

For tubelights requiring a BAL rating above BAL29 please refer to your Regent Area Manager



# REGENT SKYLIGHTS

The skylight system illustrations contained in this brochure are the sole property of Regent Skylights and are reserved under copyright law. It is the responsibility of the user to ensure that the selected skylight system complies with the relevant building codes and authorities requirements. Regent Skylights reserves the right to improve or modify the skylight systems at any time. Zinalume® and Colorbond® are registered trademarks of BlueScope Steel Limited.